




REVELATOR

MIDWOOFER

15W/8530K01

The Revelator midrange and midwoofers, both well known for their sliced paper cone technology. The slices are filled with damping glue, which dramatically reduces break-up modes in the diaphragm. In combination with Scan-Speaks low-loss linear suspension and the patented Symmetrical Drive (SD-1) it represented a breakthrough in midrange clarity and overall smooth frequency response characteristics.

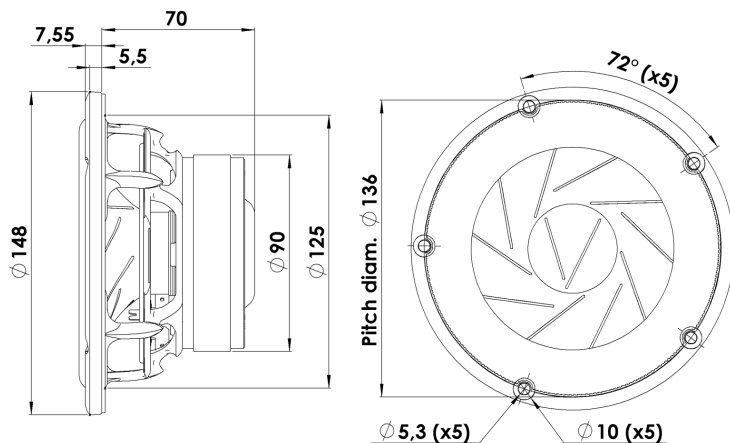

KEY FEATURES:

- Patented Symmetrical Drive Motor Design
- Coated Paper Cone
- Low Damping SBR Rubber Surround
- Sliced Cone (Controls Cone Breakups)
- Low-Loss linear suspension
- Die cast Alu Chassis vented below spider

T-S Parameters

Resonance frequency [fs]	38 Hz
Mechanical Q factor [Qms]	5.8
Electrical Q factor [Qes]	0.55
Total Q factor [Qts]	0.5
Force factor [Bl]	5.8 Tm
Mechanical resistance [Rms]	0.54 kg/s
Moving mass [Mms]	13 g
Compliance [Cms]	1.33 mm/N
Effective diaph. diameter [D]	110 mm
Effective piston area [Sd]	95 cm ²
Equivalent volume [Vas]	17 l
Sensitivity (2.83V/1m)	84.6 dB
Ratio Bl/√Re	2.4 N/√W
Ratio fs/Qts	76 Hz

Notes:

IEC specs. refer to IEC 60268-5 third edition.
All Scan-Speak products are RoHS compliant.
Data are subject to change without notice.
Datasheet updated: April 1, 2019.

Electrical Data

Nominal impedance [Zn]	8 Ω
Minimum impedance [Zmin]	6.7 Ω
Maximum impedance [Zo]	50.4 Ω
DC resistance [Re]	5.9 Ω
Voice coil inductance [Le]	0.3 mH

Power Handling

100h RMS noise test (IEC 17.1)	60 W
Long-term max power (IEC 17.3)	70 W

Voice Coil & Magnet Data

Voice coil diameter	38 mm
Voice coil height	18 mm
Voice coil layers	2
Height of gap	5 mm
Linear excursion	± 6.5 mm
Max mech. excursion	± 9 mm
Unit weight	1.2 kg






REVELATOR

MIDWOOFER

15W/8530K01

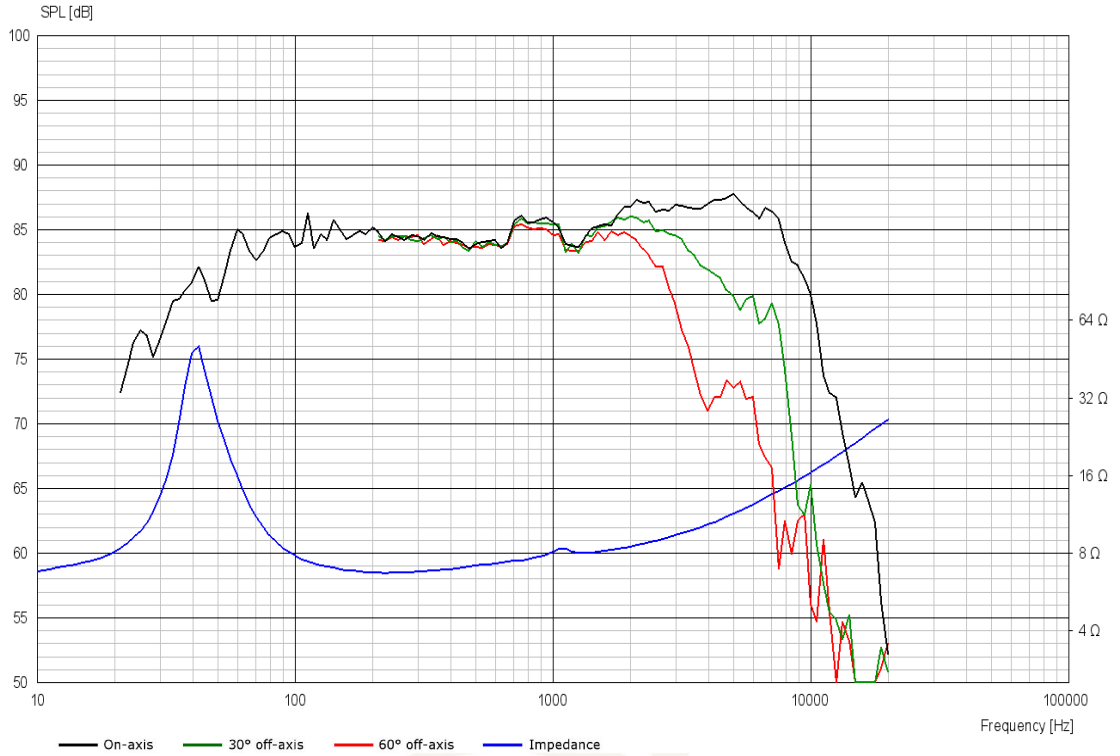

Advanced Parameters (Preliminary)



Electrical data

Resistance [$R_{E'}$]	5.87 Ω
Free inductance [L_{EB}]	0.122 mH
Bound inductance [L_E]	2.65 mH
Semi-inductance [K_E]	0.025 SH
Shunt resistance [R_{SS}]	228 Ω

Mechanical Data

Force Factor [Bl]	5.23 Tm
Moving mass [M_{MS}]	13.1 g
Compliance [C_{MS}]	1.01 mm/N
Mechanical resistance [R_{MS}]	0.47 kg/s
Admittance [A_{MS}]	0.08 mm/N

